






G316EV Glass Yarn Single Covering machine

Highly flexible and custom made high speed covering machines for most advanced yarn constructions

MAIN BENEFITS

- Very broad spectrum of applications set up through a friendly user touch screen PLC
- Fully electronic for a high level of flexibility and take-up package quality
- Easy remote access through your intranet or wireless (with electronic headstock design)
- Tailor made design possibility
- Genuine Parts Service aims to achieve optimised solutions...everywhere, everytime!

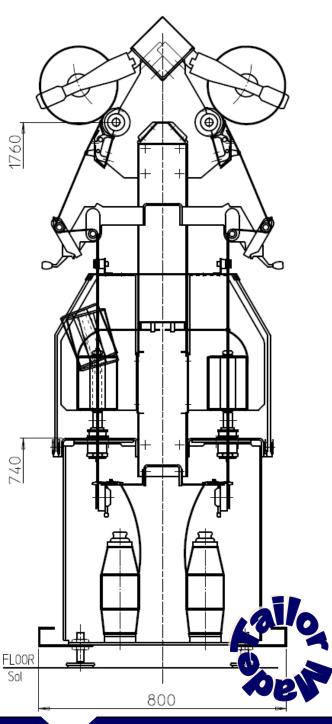

Contact us

GENERAL FEATURES	6
Maximum position nb.	120
Maximum spindle nb.	120
Gauge (mm)	260
Maximum section	12
Section length (mm)	1300
Maximum length (m)	17,8
Machine width (mm)	800

SUPPLY	
Spool (mm)	King spool
Spool Ig (mm)	338
Max. spool diam. (mm) 100

SPINDLE			
Drive	E-saving tar	ngential belt	
Maximu	ım speed (rpn	15000	
Twist (t	pm)	80 - 1600	
Spool ty	/pe E	qual flanged	
Flange	diameter (mm	1) 127	

ram weight (Kg)	1.3	
DELIVERY / TAKE UP		
Drive		
Build up Biconica	al, conical	
Maximum weight (Kg)	2.5	
Maximum diameter (mm) 200	
Tube length (mm)	230	
Maximum traverse (mm)	200	
Delivery speed (m/min)	10 - 120	
Twist (tpm)	50 - 600	
Transfer tail	Manual	

8 Allée des Muriers—BP 80201 07502 Guilherand Granges



