



Combined Two for One Twister and Direct Cabler with Heater



Genuine Parts Service

ICP


TREET



Highly flexible twisting and direct cabling machine with heater for most advanced technical yarn constructions

MAIN BENEFITS

- Very broad spectrum of application in both processes with heating treatment
- Flexible winder suitable for cylindrical or biconical wounded package
- Wide possibilities on the same machine: two for one twisting only, direct cabling only, with combined heating
- Swinging creel embedding supply and storage packages possibility
- Easy remote access through your intranet or wireless (with electronic headstock design)
- Tailor made design possibility
- Genuine Parts Service aims to achieve optimised solutions...everywhere, everytime!

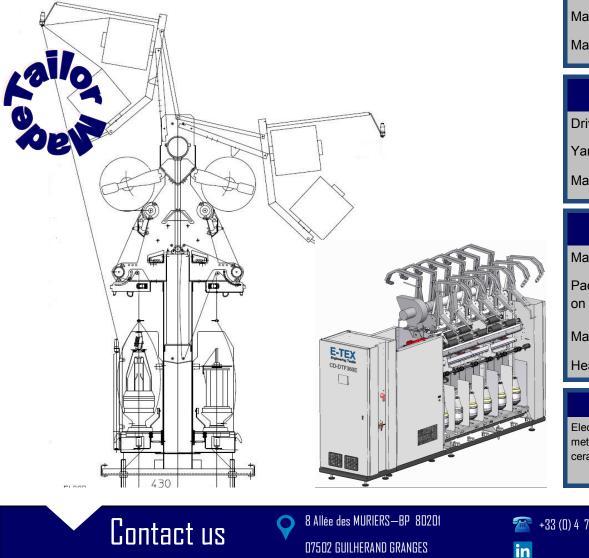

GENERALTEA	IUNES
Max. spindle nb.	144/120/100
Spindle gauge (mm)	260/325/390
Maximum section	10
Section length (mm)	2080/1950
Maximum length (m)	19.6
Machine width (mm)	900
Delivery speed (m/mi	n) 130
Twist (tpm)	90 to 1500

GENERAL FEATURES

SUPPLY

Туре	Cardboard o	ylindrical,	
milk bottle, flanged bobbin			
Yarn count	(Dtex)	44 to 940	
Max. bobbin diam. (mm) 135/150			
Maximum	weight (Kg)	3.8	

SPINDLE

Drive	E-saving tang	gential belt
Yarn brea	ak sensor	Electronic
Maximun	n speed (rpm)	14000

HEATER / TAKE UP

OPTIONS			
Heater length (mm)	500/1000		
Maximum weight (Kg)	4		
Package traverse (mm) 200/250 on cardboard cylindrical tube			
Max. diameter (mm)	250		

Electronic touch screen PLC; oiling; 1 meter length heater; ultra high quality ceramics; soft package

FRANCE

+33 (0) 4 75 86 07 58



contact@e-tex.fr

The data and illustrations in this brochure refer to the date of printing, E-TEX reserves the right to make any necessary chi any time and w/o any special notice. Photos: E-TEX. Printed in France, July 2018